

PRODUCT

DB1800A

DESCRIPTION

ACTIVE SUBWOOFER

SERIES

DB


CATEGORY

PUBLIC ADDRESS


TYPE:

POWERED &
PASSIVE

FRONT PANEL

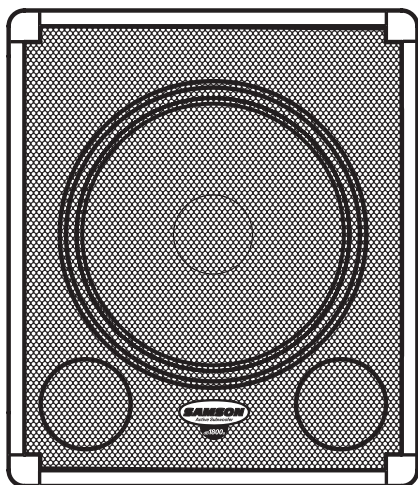

BACK PANEL

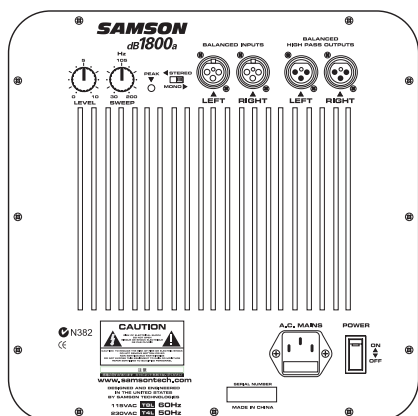**GENERAL DESCRIPTION**

The dB1800a is a self-powered subwoofer featuring an 18" heavy duty driver, complemented by a 500 Watt power amplifier. The dB1800a also offers an active stereo cross-over providing a high-passed output for running your satellite speakers. Solid 3/4 inch plywood construction, steel corners, tough carpet covering and larger casters make the dB1800a a road warrior. In fixed installation systems, the dB1800a provides super tight low frequency output in a relatively small, unobtrusive enclosure. The dB1800a is a perfect add-on to your dB500 and Expedition system, or for any sound reinforcement system where extended low-end is desired. While using your dB1800a, you'll have great low-end anywhere.

FEATURES

- > Heavy-duty, 18 inch Low Frequency Transducer With Butyl Rubber Surround
- > Built-in 500 Watt Power Amplifier
- > Balanced High Pass Outputs for Satellite Speakers
- > Variable Crossover 30 - 200 Hz
- > Stereo / Mono Operation Switch
- > Volume Control
- > Heavy-Duty, Rear Mounted Casters
- > Extra Large Grab Handles
- > 35mm Pole Mount Receptacle
- > Heavy-Duty, Steel Grill
- > 3/4" Plywood Construction, internally braced and covered in tough carpet
- > Three-year extended warranty

ARCHITECT'S & ENGINEER'S SPECIFICATIONS

The DB1800A shall be a wooden subwoofer cabinet to be used as a FOH subwoofer. It shall be black and have metal mesh grills. It shall have a 500 watt class G power amplifier. It shall have a 18 inch woofer for low frequencies. The DB1800A shall have 2 XLR balanced line inputs with level control and frequency sweep control for the crossover. The DB1800A shall have an amplifier clip and protection LED indicator. The DB1800A shall also have a mono/stereo switch. A standard IEC connector and cable will be supplied for connection to AC power sources.

PRODUCT SPECIFICATION SHEET

SERIES
DB


DESCRIPTION
ACTIVE SUBWOOFER

CATEGORY
PUBLIC ADDRESS


DB1800A

DB1800A SPECIFICATIONS

Transducer	18", Heavy Duty Driver, 4" voice coil, aluminum former
Power Rating	500 Watts RMS 1000 Watts Peak,
Frequency response	20Hz- 200Hz+/-3 dB
Input	Balanced
Connector	XLR - FEMALE
Output	Balanced, high-passed tracking low frequency crossover point
Connector	XLR - MALE
Crossover Frequency	Variable 30Hz – 200Hz
Switch Functions	
Stereo /Mono.....	Selects stereo or mono low frequency operation
Enclosure	
Construction.....	3/4" plywood, carpet covered
Finish	Black carpet
Corners	Steel
Casters	Three Inch, Heavy Duty
Mounting	Integral 1 3/8" (35mm) Pole Mount Receptacle,
Dimensions (H x W x D)	22.5" x 26.81" x 26.18" 570mm x 681 mm x 665mm
Weight	80 lbs. (36.4 kg)



FRONT



SIDE